



Circularly Polarized Patch Antenna With Enhanced Band Width & Gain



G. Samuel Raju¹ | G.V. Vinod²

¹PG Scholar, Department of ECE, Godavari Institute of Engineering and Technology, Rajahmundry, Andhra Pradesh, India.

²Assistant Professor, Department of ECE, Godavari Institute of Engineering and Technology, Rajahmundry, Andhra Pradesh, India.

ABSTRACT

In this paper, one 5×5 antenna array are studied. In each array, one probe-fed circularly polarized (CP) microstrip patch antenna is placed at the center as the driven antenna and is gapped coupled to the remaining elements. It is investigated that CP performance of the patch can be proved by properly arranging these parasitic elements. The driven patch is a perturbed square one with two diagonal corners truncated. The remaining elements are square patches slightly smaller than the driven patch. The proposed antennas have been constructed and measured. The 5×5 array has a measured gain of 9.3 dBic with a 3 dB axial ratio bandwidth of 8.1%.

Copyright © 2016 International Journal for Modern Trends in Science and Technology
All rights reserved.

I. INTRODUCTION

Microstrip antennas are widely used in a broad range of military and commercial applications. However, they usually suffer from narrow impedance bandwidth, low gain and low efficiency for linearly and even worse for circularly polarized antennas. For circularly polarized antennas, axial ratio bandwidth also needs to be catered for in addition to impedance bandwidth. In the past, many techniques have been proposed to enhance gain or widen bandwidth of a linearly polarized microstrip patch antenna. Some of them resort to the material side by using thicker or bilayered substrate [1, 2] or reducing the dielectric constant [3]. Some of them solve the problem from the structure side by using array technique [4] or by using gap-coupled method [5–10]. In principle, the two strategies should also work well for a circularly polarized microstrip patch antenna. However, there is another issue of axial ratio bandwidth that needs to be concerned especially for a circularly polarized patch antenna. One

technique developed uniquely and efficiently to enhance both impedance and axial ratio bandwidth for a circularly polarized patch antenna is the sequential rotation method [11, 12]. Moreover, as the sequential rotation method is basically an array technique, the gain of the antenna can also be increased. By using sequential rotation method, the antenna array usually requires a corporate network to feed each separate radiator. This feeding network may cause additional conductor and dielectric losses not to mention the already complicated structure. In contrast to the corporate feed network, gap-coupled method may be a good replacement to achieve a medium gain array. In [13], a medium gain of 14 dB is achieved using gap-coupled method applied to a linearly polarized case. The microstrip patch antenna is formed by an $N_x \times N_y$ array (N_x, N_y : numbers of elements in x or y direction, respectively) of rectangular metal patch radiators with parallel sides of length dx in the x direction and parallel sides of length dy in the y direction. It is also suggested in [13] that the gap-coupled method can be applied to

a circularly polarized case by adjusting d_x equal or near to d_y . However, only 3 dB gain with a less than 2 axial ratio bandwidth of 2.2% (130 MHz/5830 MHz) is experimentally verified for a 2×2 array. Hence, there leaves plenty of room to be improved for circularly polarized waves while using the gap-coupled method. In this paper, we continue effort on this area. We note that all elements in [13] include the driven patch and the parasitic elements, are of equal size. Though using different sized elements to widen impedance bandwidth is commonly seen in the literature for linearly polarized wave, its effect on widening axial bandwidth for circularly polarized wave is seldom investigated. Our investigation reveals that multi-narrow axial ratio bandwidth band can be achieved if sizes of the driven patch and parasitic elements are made equal. However, one single wide axial ratio bandwidth band can be realized by using different sized driven and parasitic elements. Furthermore, gain of the array is also increased as equivalent radiation area increases in association with the increased gap-coupled area.

II. ANTENNA STRUCTURE

Figure 1 shows geometry of the proposed gap-coupled array printed on a substrate of thickness h and relative permittivity. The ground plane is a square in shape and is dimensioned as L_{sub} by L_{sub} . One

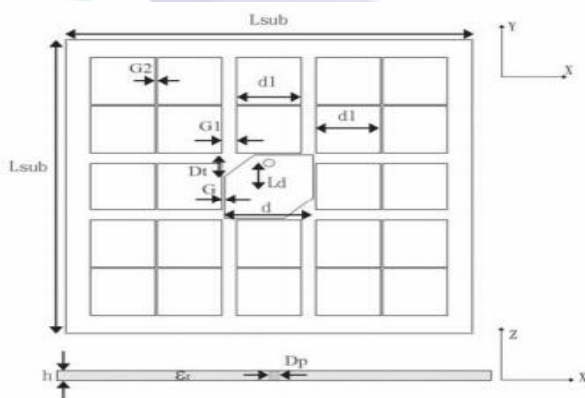


Figure 1. Geometry of a 5×5 microstrip patch array.

probe-fed circularly polarized (CP) microstrip patch antenna is placed at the center as the driven antenna and is gapped coupled to the remaining elements. The driven patch is perturbed from one d by d square patch by cutting two opposite corners with the

truncation depth determined by the parameter D_t . L_d is the distance from the feed point to the center of the driven patch. Aside from the driven patch, all parasitic patches are square in shape. Side length of each parasitic patch is d_1 and is made smaller than side length d of the driven patch as we found that using different side length helps improve array's axial ratio performance. As a result of using different side length, it is shown that two parameters, G and G_1 , are introduced to denote different separations between elements. In most cases, G_2 can be made equal to G to enhance coupling to outmost elements.

III. PRIMARY STUDY

In Fig. 1, the driven patch is surrounded by 8 elements in the inner ring and 16 elements in the outer ring. A 3×3 array can be formed by removing outer ring elements from the 5×5 array. For a 5×5 array, G_2 however can be used to control energy coupled from the driven patch to elements on the outer ring. If G_2 is made too large, little energy can Table 1. Parameters common to 3×3 and 5×5 arrays.

variable	L_{sub}	L_d	D_t	d	G_1	G	d_1	h	D_p
(in mm)	50	4.1	3.7	11	1.75	0.25	8	1.6	1.3

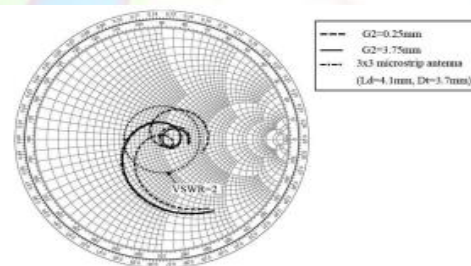


Figure 2. Impedance loci of one 3×3 array and two 5×5 arrays.

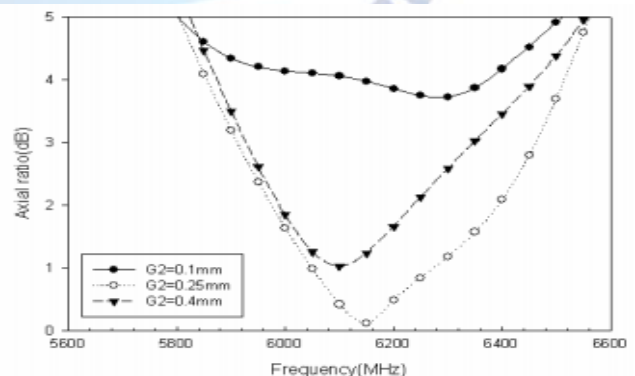


Figure 3. Axial ratio performances of the 5×5 array by varying G_2 while G_1 is fixed at 0.25 mm (other parameters are listed in Table 1).

be reached to those outer ring elements for a 5×5 array. It is shown in Fig. 2 that impedance loci for a 5×5 array with $G2 = 3.75$ mm is almost overlapped with those of a 3×3 array. Therefore, $G2$ should be made less than 3.75 mm in a 5×5 array. In this investigation, parameters common to both 3×3 and 5×5 arrays are listed in Table 1. In Table 1, G is 0.25 mm. Fig. 3 shows axial ratio performances for several 5×5 arrays by fixing G at 0.25 mm while varying $G2$. In Fig. 4, axial ratio performances are again investigated by varying G and $G2$ simultaneously. It is concluded from either Fig. 3 or Fig. 4 that the widest axial ratio bandwidth can be achieved by choosing $G = G2 = 0.25$ mm. With $G = G2 = 0.25$ mm and other parameters except Dt the same as listed in Table 1 in a 5×5 array, Figs. 5 and 6 show that both impedance and axial ratio performances varied in association with a change in Dt . The 10 dB impedance bandwidth is larger than the 3 dB axial ratio bandwidth in all cases. The overlapped bandwidth is therefore determined by the axial ratio bandwidth. In Fig. 6, we know that the larger the value of Dt is, the higher the center

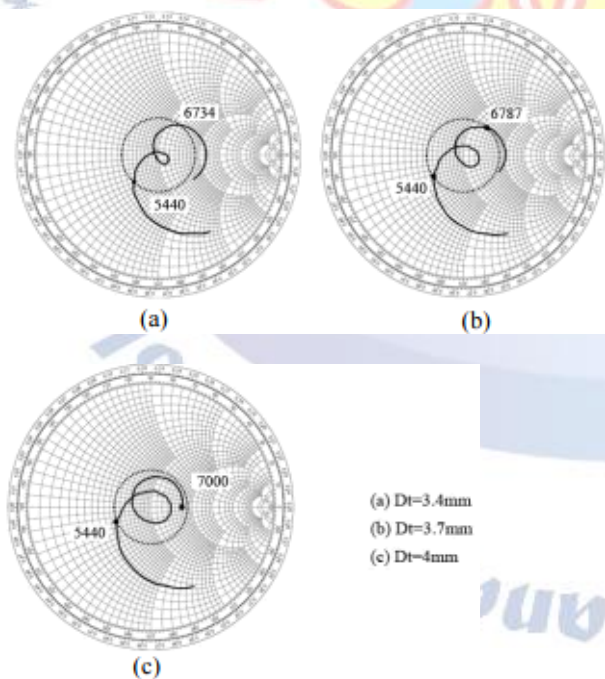


Figure 4. Axial ratio performances of the 5×5 array by varying $G1$ and $G2$ simultaneously (Other parameters are listed in Table 1).

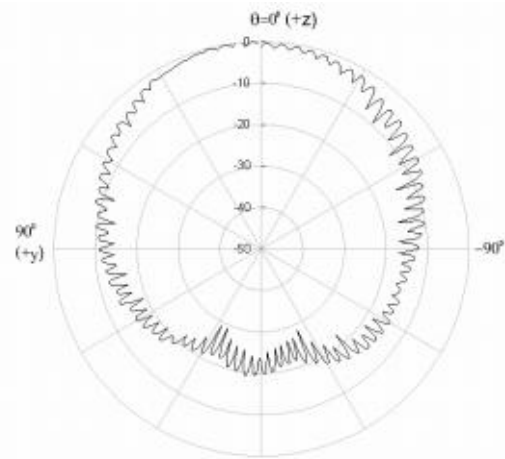


Figure 5. Measured spinning linear radiation pattern in yz -plane for the 5×5 microstrip array at the center frequency.

IV. CONCLUSION

In this paper, we have proposed a method to enhance gain and impedance/axial ratio bandwidth of a circularly polarized microstrip patch antenna by using gap-coupled method. The 3×3 and 5×5 antenna arrays are presented. Parameters of the proposed antennas have been studied. The array and the referenced single patch antenna have the same ground plane size and the same substrate thickness. Therefore, the proposed arrays do not increase dimension and thickness of the single isolated patch. However, measured CP bandwidth of the 5×5 antenna array can be increased up to 8.1% or 5.4 times compared to that of the referenced antenna. Besides, measured gain is up to 9.3 dBic at center frequency. It is 3.6 dBic higher than gain of the referenced antenna. Good performance is due to use of different sized driven and parasitic patch elements. Our investigation reveals that only multi-narrow axial ratio bandwidth band can be achieved if sizes of the driven patch and parasitic elements are made equal. However, one single wide axial ratio bandwidth band with enough gain can be realized by using different sized driven and parasitic elements.

REFERENCES

- [1]. Manteghi, M., "Wideband microstrip patch antenna on a thick substrate," Antennas and Propagation Society International Symposium, Vol. 2008, 1-4, Jul. 2008.
- [2]. Yang, R., Y. Xie, D. Li, J. Zhang, and J. Jiang, "Bandwidth enhancement of microstrip

antennas with metamaterialbilayered substrates,” Journal of Electromagnetic Waves and Applications, Vol. 21, No. 15, 2321–2330, 2007.

- [3]. Chang, F.-S., K.-L. Wong, and T.-W. Chiou, “Low-cost broadband circularly polarized patch antenna,” IEEE Trans. Antennas and Propagation, Vol. 51, No. 10, 3006–3009, Oct. 2003.
- [4]. Cui, B., J. Zhang, and X. W. Sun, “Single layer microstrip antenna arrays applied in millimeter-wave radar front-end,” Journal of Electromagnetic Waves and Applications, Vol. 22, No. 1, 3–15, 2008.
- [5]. Aanandan, C. K., P. Mohanan, and K. G. Nair, “Broad-band gap coupled microstrip antenna,” IEEE Trans. Antennas and Propagation, Vol. 38, No. 10, 1581–1586, 1990.
- [6]. Lee, R. Q., K. F. Lee, and J. Bobinchak, “Characteristics of a two-layer electromagnetically coupled rectangular patch antenna,” Electronics Letters, Vol. 23, No. 20, 1301–1302, 1987.
- [7]. Nishiyama, E., M. Aikawa, and S. Egashira, “Stacked microstrip antenna for high-gain and wideband,” IEE Proc.-Microw. Antennas Propag., Vol. 151, No. 2, 143–148, Apr. 2004.
- [8]. Chang, T. N. and H. R. Sue, “Microstripreflectarray with QUADEMC element,” IEEE Trans. Antenna and Propagation, Vol. 53, No. 6, 1993–1997, Jun. 2005.
- [9]. Wood, C., “Improved bandwidth of microstrip antennas using parasitic elements,” IEE Proc. - Microw. Antennas Propag., Vol. 127, No. 4, 231–234, Aug. 1980.
- [10]. Chang, T. N., “Methods to excite circularly polarized waves for a quad-unit,” Microwave and Optical Letter, Vol. 49, No. 10, 2372– 2375, 2007.
- [11]. Teshirogi, T., M. Tanaka, and W. Chujo, “Wideband circularly polarized array antenna with sequential rotations and phase shifts of elements,” Antennas and Propagation Society International Symposim, 117–120, Tokyo, Japan, 1985.
- [12]. Lu, K. H. and T. N. Chang, “Circularly polarized array antenna,” IEEE Trans. Antenna and Propagation, Vol. 53, No. 10, 3288– 3292, Oct. 2005.

badminton His research interests in the field of Communication Systems, Embedded Systems and Robotics.



G.V. Vinod Received the M.Tech, Degree in Electronics and Communication Engineering in the Specialization of Digital Electronics and Communication Systems (DECS). From the Jawaharlal Nehru Technological University (JNTUK), Kakinada. He is currently working as an

Assistant Professor in the Department of Electronics and Communication Engineering (ECE), in Godavari Institute of Engineering and Technology (GIET), Rajamahendravaram. His research interests in the field of Electromagnetic (EM) Fields and Radar Systems.

Author Profiles:



G. Samuel Raju His desire is to achieve his goals for that he will put his best efforts. He have a good knowledge in communication systems and His goal is to get a job in Reputed Organization and long term goal is to be in a Respectable position in that organization. His hobbies are playing